

Radiation Shielded Doors

Marshfield Signature Series®

Neutral Pressure, Positive Pressure, Environmental, DurableDoor™


Standard Models: WXR, DURXR

Environmental Models: EXR, EXRUF

Product Features
and Specifications

Interior Use Only

Thickness	1-3/4" – when lead thickness exceeds 3/32" door thickness increases
Lead Thickness	1/32" to 1/2"
Lead Location	<ul style="list-style-type: none"> • Outer Lead: 1/32" through 1/4" lead • Center Lead: Over 1/4" lead One sheet; laminated in door center.
Fire Ratings	20, 45 & 60 minute
Maximum Size	ITS-WH: Single: 4/0 x 8/0 Pair: 8/0 x 8/0
Minimum Size	0/8 x 1/10 or 1/10 x 0/8
Astragal at Pairs	Lead lined, matching or mill option lumber or MEA.
Faces	<ul style="list-style-type: none"> • Wood Veneer • MDO • Decorative Laminate • Primed Hardboard • DurableDoor™ PVC Face
Stiles	Manufacturer's standard construction per label service listing
Rails	Manufacturer's standard construction per label service listing
Face & Core Assembly Adhesive	Per requirements of WDMA I.S. 1A, C-6
Core	Particleboard or Structural Composite Lumber Core (SCLC)
Lite Openings	One lite only, area not to exceed 1296 sq. in. of visible glass or one continuous dimension of 36" wide or 54" high. WXR- 1: Wood or metal lite kits WXR- 20: Double glazed metal kit
Factory Finish	<ul style="list-style-type: none"> • Enviroclad UV® finish • Prime • Opaque
Warranty	Full; life of original installation. No exterior warranty
Door Weight	1/16" lead = 9.2 lbs per sq ft. 1/8" lead = 13 lbs per sq ft.
Environmental Options & LEED Credit Contribution (Not all credits may be available with some constructions)	<ul style="list-style-type: none"> • MR 4-Recycled Content- all models • MR 6-Rapidly Renewing Materials- all models with Bamboo veneer • IEQ 4.4-Low-Emitting Materials- all UF models No Added Urea Formaldehyde Resins

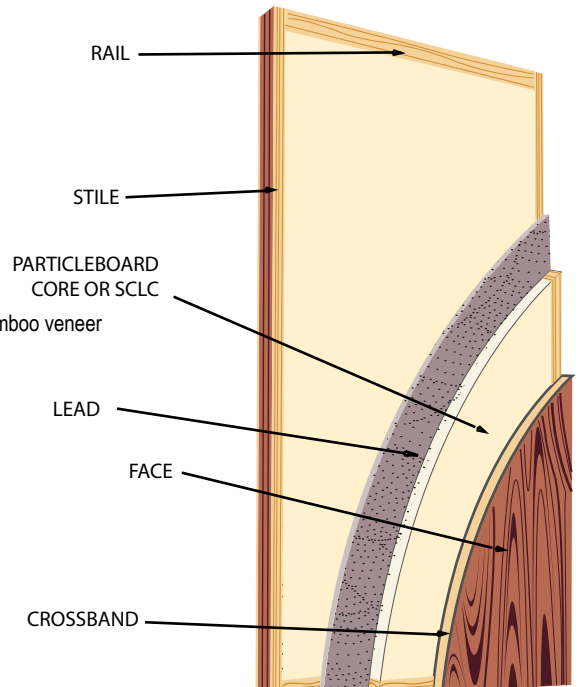

The mark of excellence™



Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.