



L-FRA100

Low Profile Self-Attaching Lite Kit for 1 3/4" Door with 3/16" or 1/4" Glass

STANDARD FEATURES


- * 20 ga. cold rolled steel
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Counter-sunk mounting screw-holes
- * #8 x 3/4" Phillips head SMS
- * Available in uneven and fractional sizes
- * Standard finish = (GPZ) Gray Primer

OPTIONAL FEATURES


- * See page L2 for optional finishes
- * Torx Security Screws
- * Galvanneal - A40 Steel
- * Zinc electro-plating
- * Glass & Glazing tape (Pages L23-L27)
- * Lead lining

UL10C POSITIVE PRESSURE FIRE-RATED

- * Fire-rated 1/4" wire glass:
20 min. requires closed cell PVC foam glazing tape like NGP GT-I16.
45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- * Fire-Lite® NT, or Fireglass 20™
requires closed cell PVC foam glazing tape like NGP GT-I16 or GT-I18.

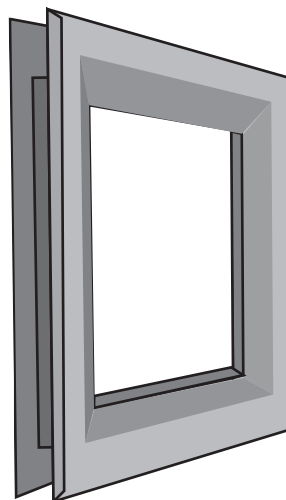

Designed for use on 1 3/4" thick doors manufactured within door industry tolerance of +/- 1/16".

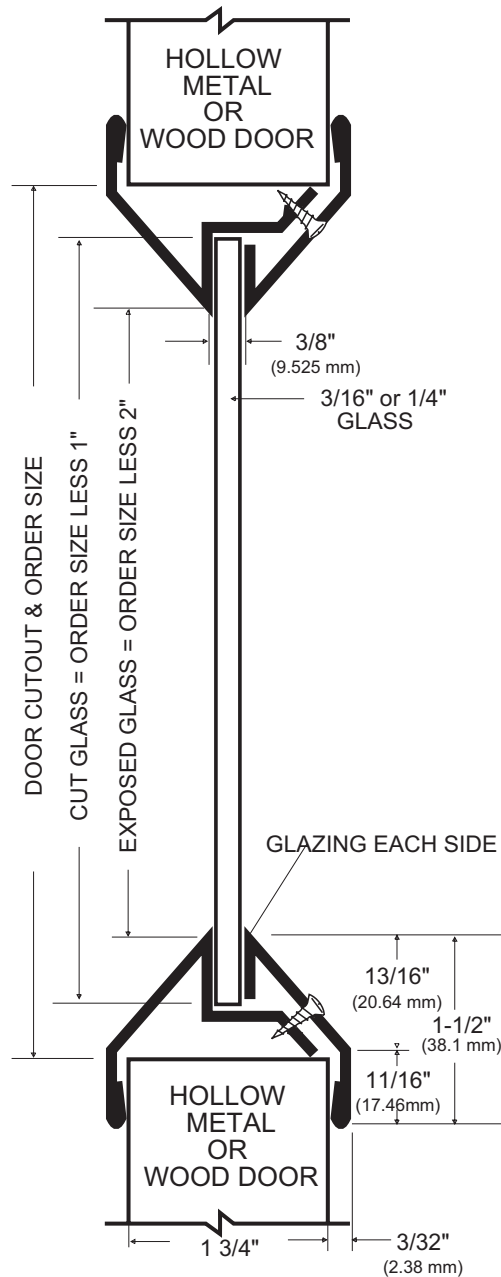

not to scale

