


161 Lock Prep


- For Bored/Cylindrical locksets conforming to ANSI A115.2
- KNOB trim or deadlock applications

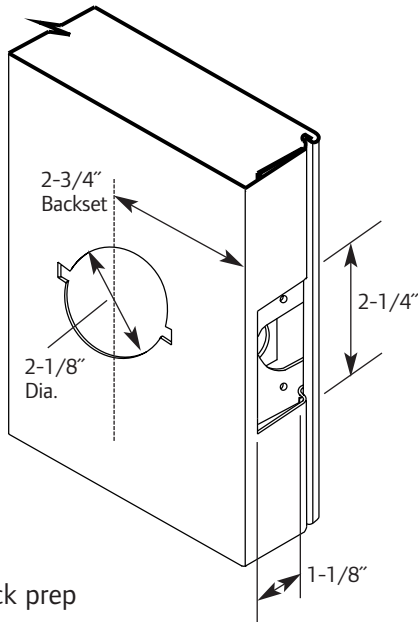

161 for full lock prep

Prep options:


- 161-48** = 48" above bottom of frame
- 161-60** = 60" above bottom of frame
- 161-SPL** = special location
- 161R** = with RPD reinforcements
- 161V** = with VRPD reinforcement

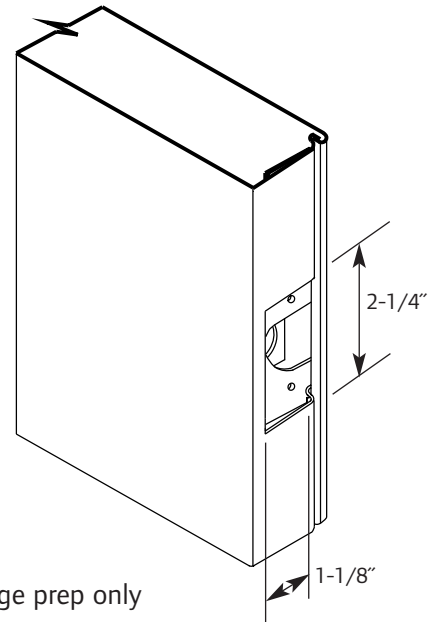

161ED for edge prep only

Prep options:

- 161ED-48** = 48" above bottom of frame
- 161ED-60** = 60" above bottom of frame
- 161ED-SPL** = special location
- 161EDR** = with RPD reinforcements
- 161EDV** = with VRPD reinforcement

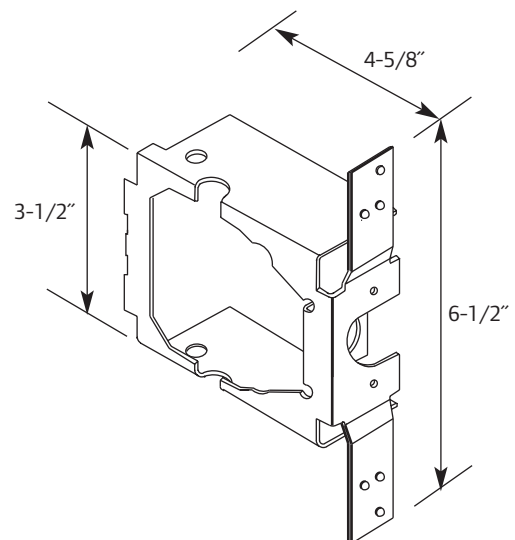


Lock Reinforcement Detail

- 16 gage
- Projection welded to door edge
- Extruded and tapped holes for lock front attachment

160 & 160-4 Lock Prep

- For Bored/Cylindrical locksets conforming to ANSI A115.2
- KNOB trim or deadlock applications

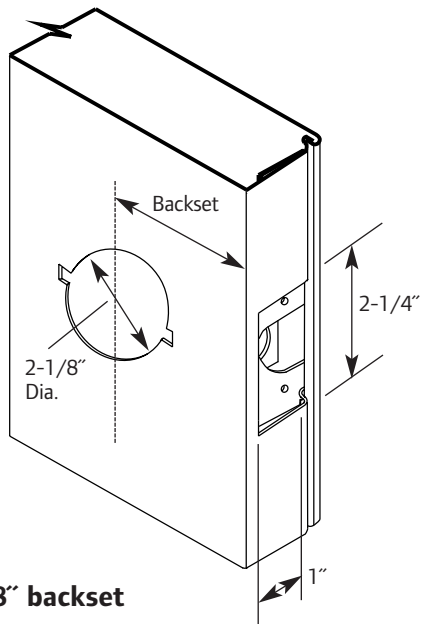

160 for 2-3/8" backset


Prep options:

- 160-48** = 48" above bottom of frame
- 160-60** = 60" above bottom of frame
- 160-SPL** = special location

160-4 for 2-3/4" backset

Prep options:


- 160-4-48** = 48" above bottom of frame
- 160-4-60** = 60" above bottom of frame
- 160-SPL** = special location

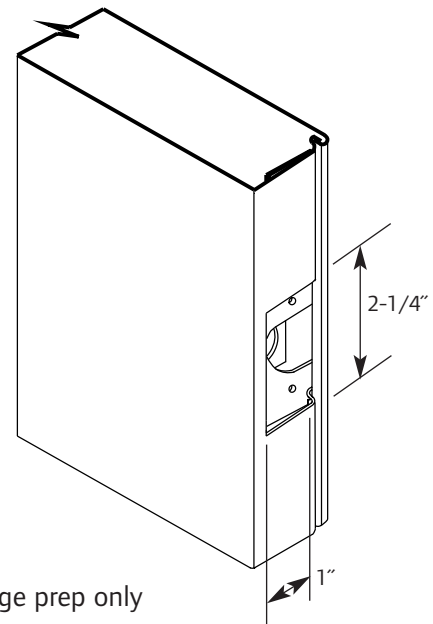

160ED for edge prep only

Prep options:

- 160ED-48** = 48" above bottom of frame
- 160ED-60** = 60" above bottom of frame
- 160ED-SPL** = special location


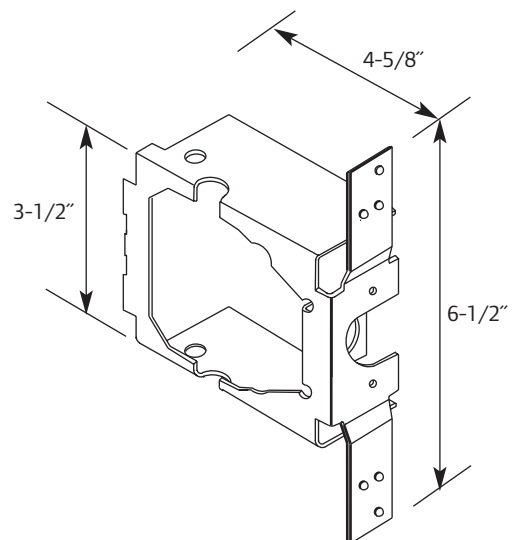


Lock Reinforcement Detail

- 16 gage
- Projection welded to door edge
- Extruded and tapped holes for lock front attachment

61L Lock Prep

- For Bored/Cylindrical locksets conforming to ANSI A115.18
- LEVER trim or deadlock applications

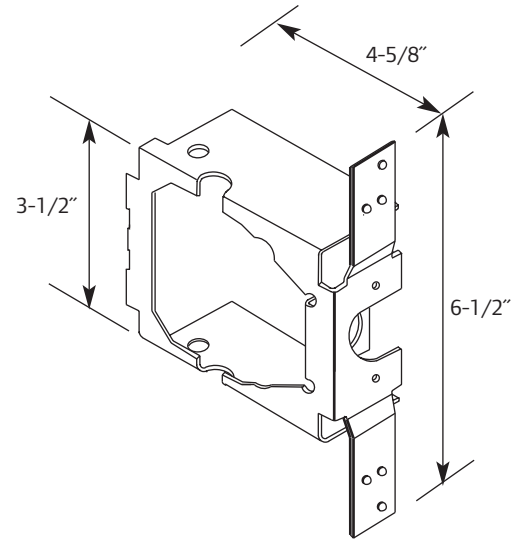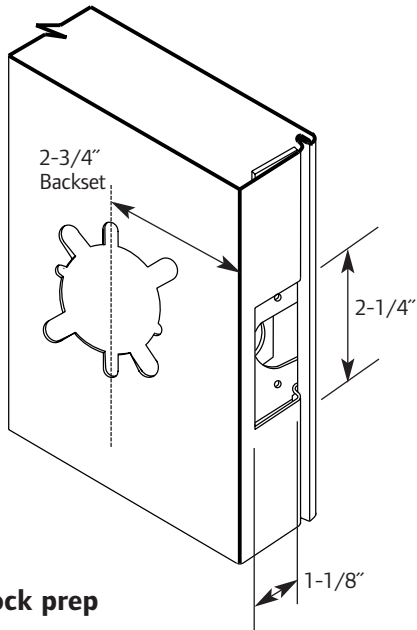

61L for full lock prep


Prep options:

- 61L-48** = 48" above bottom of frame
- 61L-60** = 60" above bottom of frame
- 61L-SPL** = special location
- 61LR** = with RPD reinforcements
- 61LV** = with VRPD reinforcement

Lock Reinforcement Detail


- 16 gage
- Projection welded to door edge
- Extruded and tapped holes for lock front attachment

Note – for locks installed in this prep must include Rose (trim) with minimum 3-1/2" diameters.

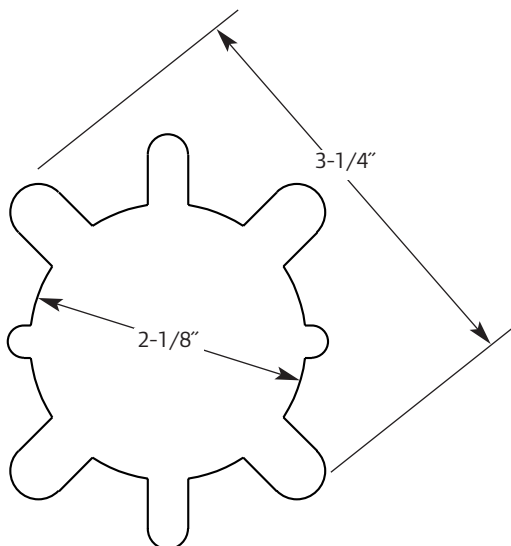

86 Lock Prep


- For Mortise locksets conforming to ANSI A115.1
- Preparation for full escutcheon trim

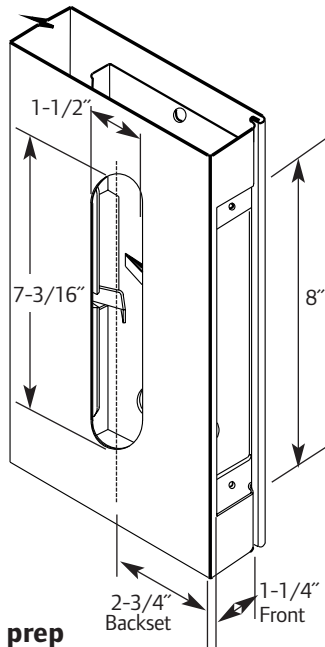

86 for full lock prep

Prep options:


- 86-48** = 48" above bottom of frame
- 86-60** = 60" above bottom of frame
- 86-SPL** = special location
- 86R** = with RPD reinforcements
- 86RV** = with VRPD reinforcement

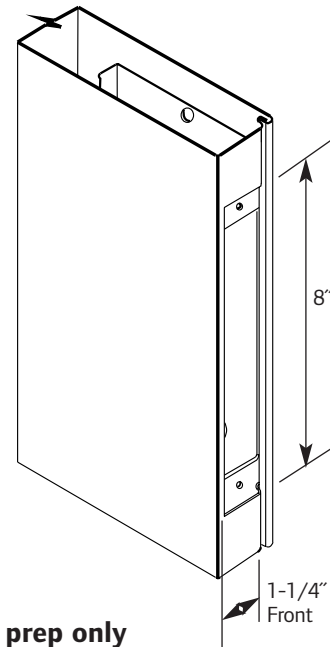

86ED for edge prep only

Prep options:

- 86ED-48** = 48" above bottom of frame
- 86ED-60** = 60" above bottom of frame
- 86ED-SPL** = special location
- 86DR** = with RPD reinforcements
- 86EDV** = with VRPD reinforcement

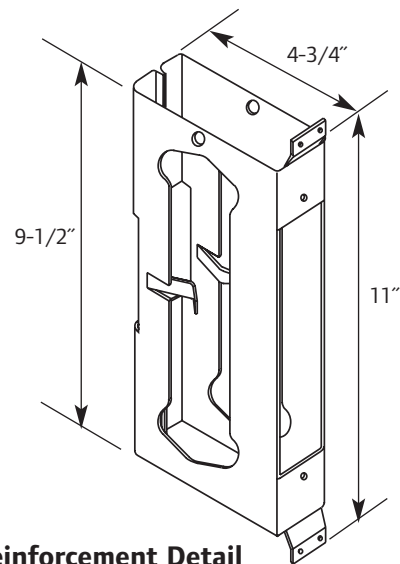

Lock Reinforcement Detail

- 14 gage
- Projection welded to door edge
- Extruded and tapped holes for lock front attachment



86 Lock Prep for commercial and institutional applications

7C6 Lock Prep

- For Mortise locksets conforming to ANSI A115.1
- Preparation for sectional trim per Steelcraft hardware catalogs
- Nomenclature varies with lock catalogue requirements

Special Lock Prep

- Nomenclature “SPECIAL” designates templated hardware prep is required. Lock number and template number must be specified

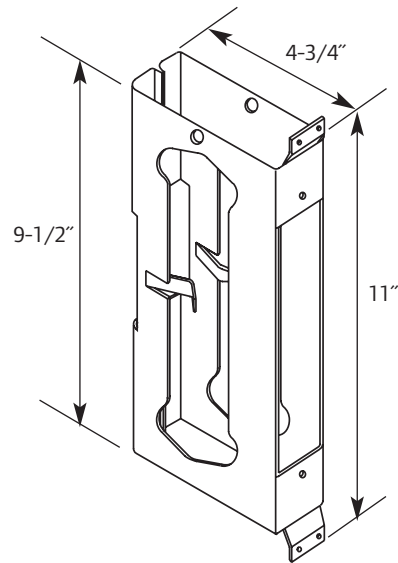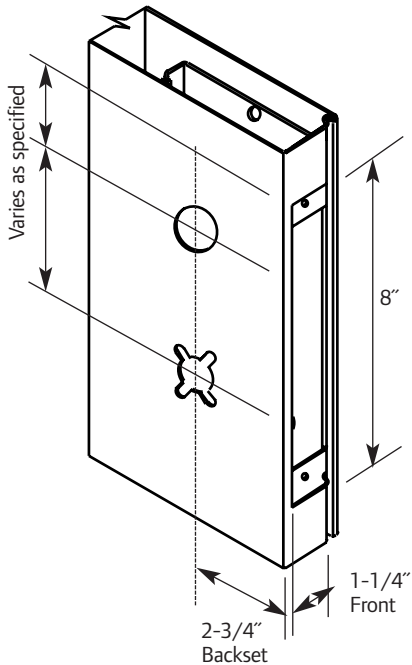

7C6 - for Schlage L9050, L9453, L9456, L9473, L9485 (RH/LH)

- **7C6** = Refer to Steelcraft Hardware Catalogs for all prep designations

SPECIAL

- Designation for sectional trim when ordered by manufacturers template numbers

Lock Reinforcement Detail

- 14 gage
- Projection welded to door edge
- Extruded and tapped holes for lock front attachment