

# Fire-Resistant Composite Core Doors– 45-90 Minute

*Marshfield Signature Series®*

Neutral Pressure , Positive Pressure, Environmental, DurableDoor™

Standard Models: DFP, DFM, DURFP, DURFM

Environmental Models: EFPUF, EFMUF, DURFMUF, EDURFPUF

## Product Features and Specifications

## Interior Use Only

### Thickness

1-3/4"

### Maximum Size

	ITS-WH and UL		
	NP	Cat A (PP)	Cat B (PPFM)
Single	4/0 x 10/0	4/0 x 10/0	4/0 x 10/0
Pair	8/0 x 8/0	8/0 x 9/0	8/0 x 9/0
DE Pair	8/0 x 8/0 (45 min. only)	8/0 x 8/0	8/0 x 8/0

### Minimum Size

0/8 x 1/10 or 1/10 x 0/8

### Faces

- Wood Veneer
- Decorative Laminate
- DurableDoor™ PVC Face
- MDO
- Styled® Door Face

### Crossbands

Engineered Composite, if required per label service listing

### Stiles

Manufacturer's standard construction per label service listing with edge band to match face.

### Top and Bottom Rails

Manufacturer's standard construction per label service listing

### Face & Core Assembly Adhesive

Per requirements of WDMA I.S. 1A, C-6

### Core

Fire-resistant composite per label service listing

### Lite Openings

See Appendix I

### Factory Finish

- Enviroclad UV® finish
- Prime
- Opaque

### Warranty

Full; life of original installation. No exterior warranty

### Security Rating

Mineral Core- Class 30 per UBC standard 41-1 and ASTM F - 476 Section 18  
Particleboard Core- Class 40 per UBC standard 41-1 and ASTM F - 476 Section 18


### Acoustic Rating

See Appendix M

### Environmental Options & LEED Credit Contribution

(Not all credits may be available with some constructions)

- MR 4-Recycled Content- all models
- MR 5-Regional Materials- EFPUF & EDURFPUF models
- MR 6-Rapidly Renewable Materials- all models with Bamboo veneer
- MR 7-Certified Wood- EFPUF & EDURFPUF models
- IEQ 4.4-Low-Emitting Materials- all UF models  
No Added Urea Formaldehyde Resins

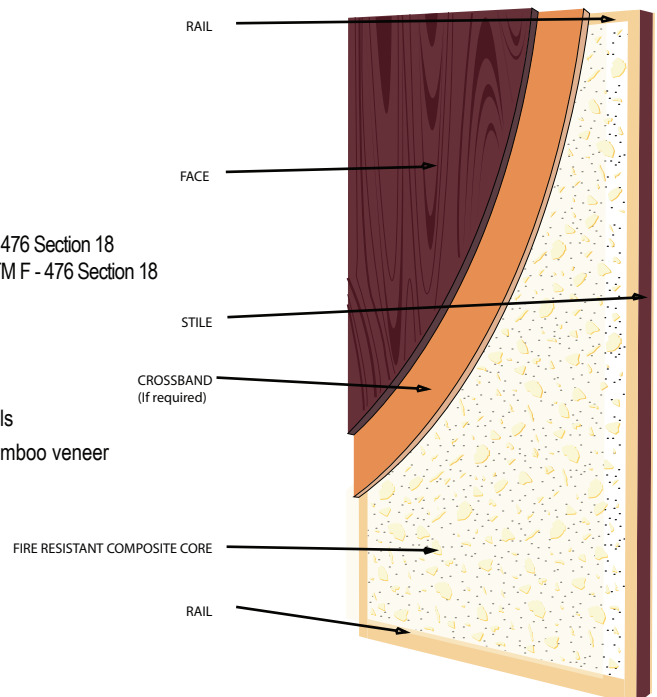

The mark of excellence™ 

Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.